



Multi Control Centres w/ Multi Protocols

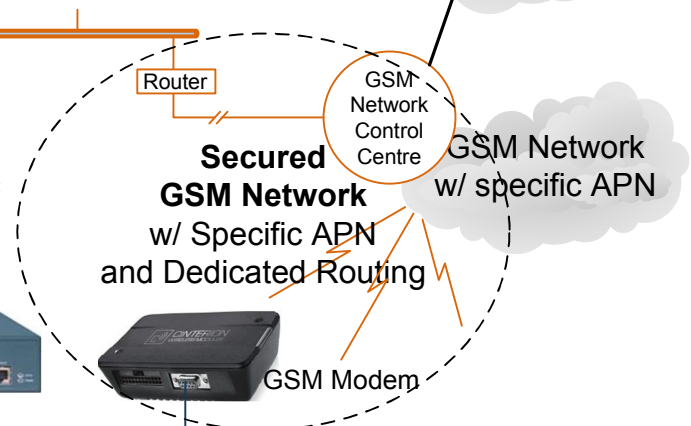




Protocols to Upstream :
[running concurrently]
IEC 60870-5-101 (Serial)
IEC 60870-5-104 (Ethernet)
DNP 3.0 (Serial)
DNP 3.0 TCP (Ethernet)
Modbus RTU (Serial)
Modbus TCP (Ethernet)
EDF HNZ RTU (Serial)
EDF HNZ Concentrator

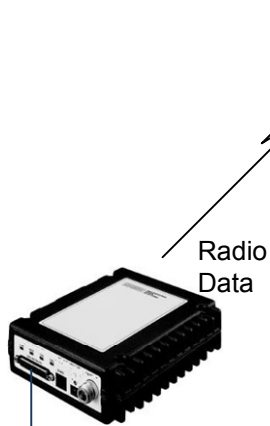

Substation Automation



Protocols to Downstream :
[running concurrently]
IEC 60870-5-101 (Serial)
IEC 60870-5-103 (Serial)
IEC 60870-5-104 (Ethernet)
IEC 61107 / 62056 (Serial)
DNP 3.0 (Serial)
DNP 3.0 TCP (Ethernet)
Modbus RTU (Serial)
Modbus TCP (Ethernet)
EDF HNZ RTU (Serial)
ABB Indactic33 (Serial bit-sync)
ABB SPABus (Serial)
Dummy Slave Emulator

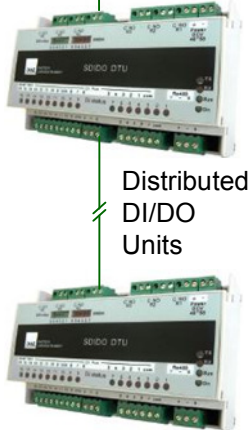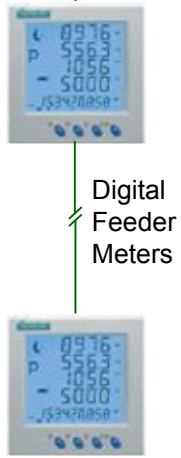

Remote End-Point Measurements