

# IDM 50B

# Multi-Standard Modem



## Features

- ▶ A programmable modem for SCADA or power utility communication network
- ▶ Multi-standard support: ITU R.35, R.37, R.38A, R.38B, V.21, V.23, V.29, Bell 103 and 202
- ▶ Fully programmable via Hayes AT command set
- ▶ Specialized Line, Power Line Carrier or radio communication
- ▶ Half or full-duplex operating mode

## Description

IDM 50B is a frequency shift keyed (FSK) and quadrature amplitude modulation (QAM) modem for asynchronous and synchronous data transmission in 300-3400 Hz voice band. It is highly immune to interference and noise and permit extensive voice-band communication link utilization.

The modem supports several international standards ITU V.21, V.23, R.35, R.37, R.38A, R.38B, V.29, Bell 103, Bell 202 and proprietary Cegelec 1200/600Bd and Indactic 33 communication standards.

The modem can operate in half or full-duplex, point-to-point or point-to-multipoint mode. When using FSK modulation receive and transmit channels may be independently set.

The modem employs advanced DSP technology, thus offering high service flexibility through programmable features. Software configuration is performed via Hayes AT command set. AT commands can be initiated from any terminal application using RS-232 communication interface. Additionally, for easy firmware upgrade a bootstrap loader is provided.

## Application


IDM50 is designed for use in SCADA systems mainly based upon power utility communication networks. Depending of modulation standard it can communicate through specialized, private or leased lines, radio links and power lines (PLC).

## Mounting Types

IDM50 is available as a desktop modem or in two different types of standard 19" rack:

- 1U rack with 1, 2 or 3 modems per rack;
- 3U rack with 10,12 or 14 modems per rack, and additional blank front plates covering unused slots.

All connectors at the rear side are accessible at the back openings.

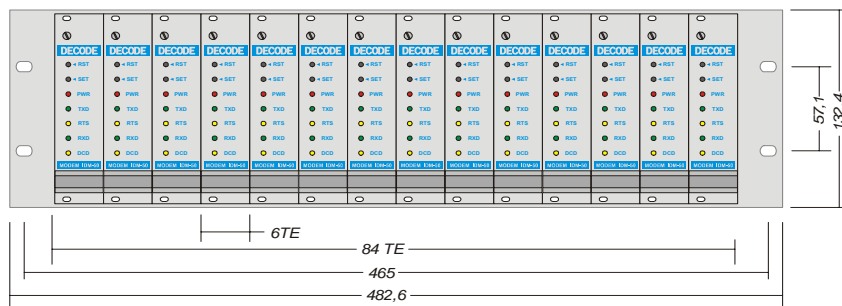

3U rack version with 14 modems per rack

## Specifications

Operation	
<b>Type</b>	Data transmission on audio frequency analog medium.
<b>Media</b>	Leased line, Radio, PLC
<b>Modes</b>	- Asynchronous or synchronous, Point-to-point, multipoint, 2-wire or 4-wire - Support for synchronous Indactive 33 protocol

Standards					
FSK	Transmission rate	Frequency deviation	Channel spacing (bandwidth)	Channel mean frequency adjustable in steps of 120Hz	
	Bd	Hz	Hz	Lowest Hz	Highest Hz
<b>ITU R.35</b>	50	± 30	120	420	3300
<b>ITU R.37</b>	100	± 60	240	480	3120
<b>ITU R.38B</b>	200	± 90	360	540	3060
<b>ITU R.38A</b>	200/300	± 120	480	600	3480
<b>ITU V.21</b>	300	± 100	400	1080 / 1750	
<b>ITU V.23 /0 /1 /2</b>	600/1200	± 200 / 400	800 / 1600	2850 / 1500 / 1700	
<b>Bell 103</b>	300	± 100	400	1170 / 2125	
<b>Bell 202</b>	1200	± 500	2000	1700	
QAM	Transmission rate	Symbol rate	Constelation points	Carrier frequency	Mode
	Bps			Hz	
<b>ITU V.29</b>	4800	2400	4	1700	Half duplex
	7200	2400	8	1700	Half duplex
	9600	2400	16	1700	Half duplex

Interfaces	
<b>DTE interface</b>	- RS-232C, DB9 (female) connector - Signals: DCD, RD, TD, DTR, SG, DSR, RTS, CTS, RI - Character length: 5-9 data bits, 1 start, 1 stop - RTS/CTS delay: adjustable by 1ms step within range of 40-6825ms - Option to switch on fail relay if DCD off - Option to transmit on RTS - Configuration: AT command set
<b>Analog line</b>	- DB15 (female) connector; - 600Ω or high impedance with return loss < 0.2; - Transmission level: 0 to -32dBm, programmable by 1dB step - Receive level: 0 to -36dBm, programmable by 1dB step, min. -48dBm - Radio control: half-duplex control and squelch detection
<b>Power supply</b>	2-position screw plug type (for 2-2.5mm <sup>2</sup> wire)

General	
<b>LED indication</b>	PWR, TXD, RXD, RTS, DCD
<b>Power supply</b>	9-18VDC, 9-12VAC, model -12 18-36VDC, 14-23VAC, model -24 36-72VDC, 25-50VAC, model -48
<b>Isolation</b>	Transformer up to 1500V
<b>Immunity to noise</b>	- Peak pulse noise: 100V Peak - Effective interference at 50 Hz: 80V rms
<b>Temperature</b>	Operation and storage: -10° to +50 °C
<b>Dimensions</b>	- desktop: aluminium enclosure 112x30x170mm - 19" rack: EUROCARD PCB, 160x100mm 3HE, 6T in 1U and 3U rack